





• Thank you for purchasing r KOSO Cup holder. Before installing, please read the instruction sheet carefully. We recommend that you store the instruction sheet in a safe place for future reference.

●FOR INSTALLATION, PLEASE FOLLOW THE STEPS DESCRIBED IN MANUAL. ANY DAMAGE CAUSED BY WRONG INSTALLATION SHALL BE IMPUTED TO THE USERS.

•DO NOT DISASSEMBLE OR CHANGE ANY PARTS EXCLUDING THE MANUAL DESCRIPTION.

MARK MEANING:


NOTE YOU COULD GET THE INSTALLATION DETAILS FROM THE INFORMATION BEHIND THE MARK.


SOME PROCESSES MUST BE FOLLOWED TO AVOID THE AFFECTION CAUSED BY WRONG INSTALLATION.

A WARNING! SOME PROCESSES MUST BE FOLLOWED TO AVOID DAMAGES TO YOURSELF OR THE PUBLIC

A CAUTION! SOME PROCESSES MUST BE FOLLOWED TO AVOID THE DAMAGE TO THE VEHICLE

# 1 ACCESSORY












**NOTE** PLEASE CONTACT US IF THE ITEMS YOU OPEN ARE NOT THE SAME, WITH THE ABOVE-LISTED ONES.

### 2 INSTALLING

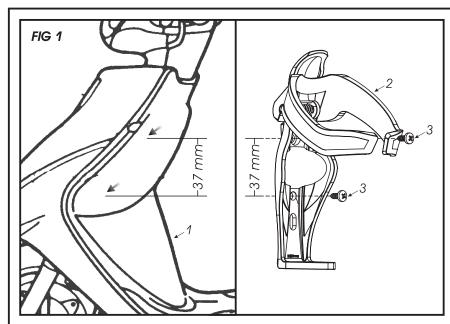

# Please fllow the step as below for install cup holder

1.Scooter back cover...

**NOTE** Drill two 4~4.5mm hole (hole distance 37mm) on the position where you would like to install cup holder. ( See Fig 1)


2.Cup holder(Accessery 1).

3. Self tapping screw(Accessory 4).

↑ Put self tapping screw(3) through cup holder to lock cup holder on back cover.

riangle  $extit{WARNING!}$  By this way the cup holder can only install on scooter.

**CAUTION!** The limited loading of cup holder is 600 gram.

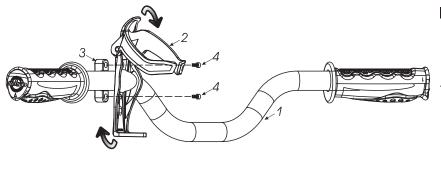

## TO install cup holder on handlebar

1.Handlebar。

2.Cup holder (Accessory 1)

3. Bracket ( Accessory 2)

4.HEX socket screw (Accessory 3)

Put cup holder on handlebar and adjust the angle to the position you would like to install. Use HEX socket cap screw(4) through cup holder and lock it on bracket(3) by 5mm wrench

**MARNING!** By this way the cup holder can only iństall on handlebar

A CAUTION! The limited loading of cup holder is